
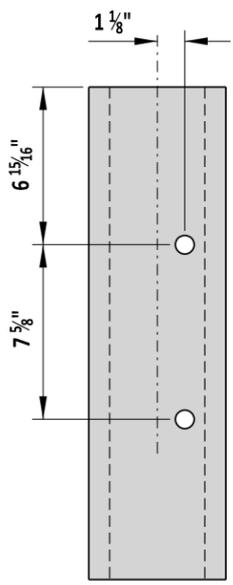
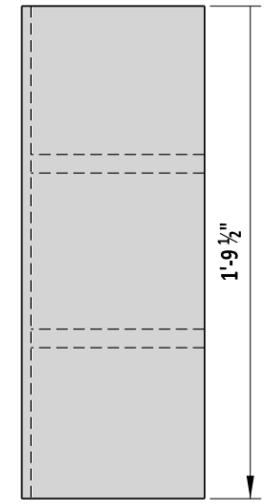


NOTE:
WHERE CONDITIONS REQUIRE,
USE ALTERNATE LENGTHS IN
INCREMENTS OF 6"

OPTIONAL FOR
HANDLING DURING
GALVANIZING

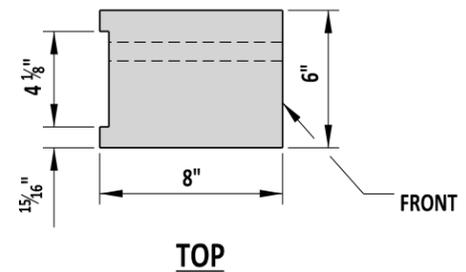

OFFSET BLOCK

- NOTES:
- 1). ALL HOLES SHALL BE $\frac{13}{16}$ " DIA. BOLT HOLE PATTERN IS SYMMETRICAL WITH RESPECT TO THE VERTICAL AXIS OF THE POST.
 - 2). STEEL POST AND OFFSET BLOCK DETAILS ARE BASED ON NCHRP 350 CRASH TESTING - MASH COMPLIANT DETAILS ARE NOT YET AVAILABLE


THRIE BEAM STEEL POST AND OFFSET BLOCK

POST 2




 ENGINEERING SUPPORT DATE 09/01/2020
RECOMMENDED

THRIE BEAM STEEL POST AND OFFSET BLOCK			
STANDARD NO.	B-13 (2020)	SHT.	5 OF 12

REVIEWED  DATE 09/01/2020
DEPUTY DIRECTOR - DESIGN
 APPROVED  DATE 09/01/2020
CHIEF ENGINEER